

FUSE 10X38 25A 1000 VDC GPV S**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com**Similar to illustration**

The gPV cylindrical fuse cartridges are designed to provide compact, safe and economical protection of photovoltaic modules (field protection) with voltages up to 1,500 DC. They provide protection against both overload and short circuit (gPV class according to the requirements of IEC60269-6 and UL248-19 standards). Made of a ceramic tube with high internal pressure and thermal shock resistance, allowing high switching capacity in a small space. The contacts are made of silver-plated copper and the fusible elements of pure silver to avoid ageing and thus keep the electrical characteristics invariable. They are available in the sizes 10x38 mm, 10x85 mm and 22x58 mm.

General ordering data

Version	Photovoltaics, Cartridge fuse, 1000 V, 10x38, gPV, 25 A
Order No.	2827990000
Type	FUSE 10X38 25A 1000 VDC GPV S
GTIN (EAN)	4064675367819
Qty.	10 pc(s).

FUSE 10X38 25A 1000 VDC GPV S**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data**Dimensions and weights**

Height	38 mm	Height (inches)	1.496 inch
Width	10 mm	Width (inches)	0.394 inch
Diameter	10.3 mm	Net weight	7.8 g

Temperatures

Storage temperature	-40°C ... 90°C	Operating temperature range	-40°C ... 80°C
---------------------	----------------	-----------------------------	----------------

Fuse cartridge

Fuse-link standard	IEC 60269-1, gPV (EN 60269-6)	Current	25 A
Rated DC voltage	1,000 V	Rated breaking capacity	10 kA
Contact material	silver-plated	Power dissipation, max.	3.5 W

Classifications

ETIM 7.0	EC002704	ETIM 8.0	EC002704
ETIM 9.0	EC002704	ECLASS 11.0	27-14-20-02
ECLASS 12.0	27-14-20-02	ECLASS 13.0	27-14-20-02
ECLASS 14.0	27-14-20-02		

Environmental Product Compliance

RoHS Compliance Status	Compliant without exemption
REACH SVHC	No SVHC above 0.1 wt%

Approvals

ROHS	Conform
------	---------

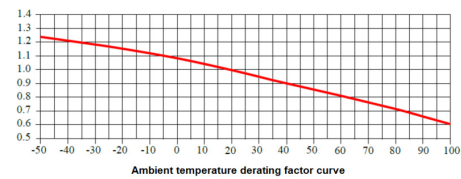
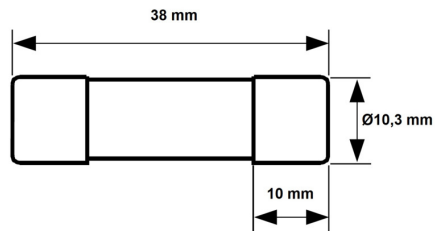
Downloads

Approval/Certificate/Document of Conformity	CE-Declaration_10x38_gPV_Fuses
Technical Documentation	Chracteristic for 10x38 gPV Fuses Chracteristic for 10x38 gPV Fuses Chracteristic for 10x38 gPV Fuses
Catalogues	Catalogues in PDF-format

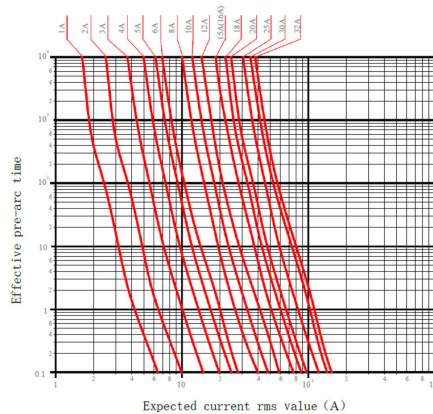
FUSE 10X38 25A 1000 VDC GPV S

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany

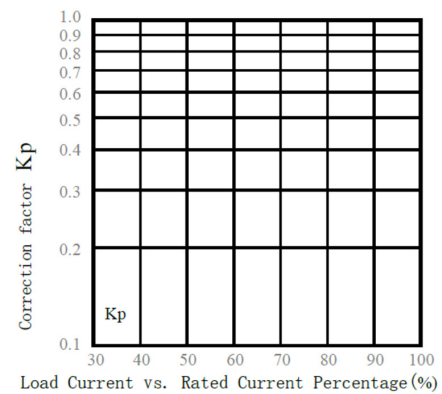
www.weidmueller.com

Drawings**Derating curve**

Ambient temperature derating factor curve

Graph

T-I characteristic curve

Graph

Power loss correction factor chart