

Actuator

51-
461.036



<https://eao.com/p/51-461.036>

Your product:



51-461.036 Actuator

FRONT

Front bezel material:	Plastic
Front bezel colour:	Black
Front dimension:	24 mm x 18 mm

MOUNTING

Design:	raised
---------	--------

OPERATING-/INDICATION PART


Lens illumination:	illuminative
--------------------	--------------

ELECTRICAL CHARACTERISTICS

Switching voltage and switching current:	100 mA at 42 VAC/VDC
Electric strength:	2500 VAC, 50 Hz, 1 min. between all terminals and earth, according to IEC 61058-1, part 15
Contacts:	2 NO

MECHANICAL CHARACTERISTIC

Switching system:	This low-level switching element was designed for switching low powers in electronic circuits. The mechanism assures reliable switching of loads ranging from a few $\mu\text{A}/\mu\text{V}$ up to 100 mA/ 42 VAC/DC. Single-break momentary contact, as normally open or normally closed with 4 independent points of contact. 2 momentary contacts per switching element; combination of normally open and normally closed is possible. Special features are the long life, extremely short rebound time and stable contact resistance.
Mechanical lifetime:	1 Mio. cycles of operation

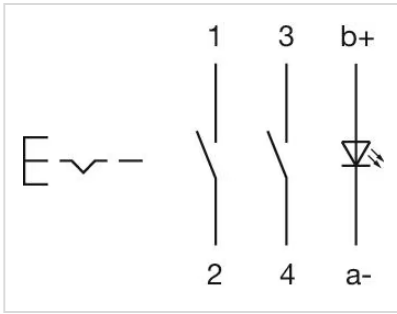

Dimension drawings:

