

Product data sheet

Specifications



Mini circuit breaker, QO, 50A, 3 pole, 120/240VAC, 10kA, bolt on mount, AC shunt trip

QOB3501021

⚠ Discontinued on: May 2, 2025

⚠ To be end-of-service on: May 2, 2026

⚠ Discontinued

Main

Product	Miniature circuit-breaker
Range	QO
Current Rating	50 A
Voltage Rating	120/240 V AC 240 V AC 120 V AC
Mounting Type	Bolt-on
Number of Poles	3P
Circuit Breaker Type	Standard
Ratings	HACR rated
Electrical Connection	Box lugs
Options	Shunt trip 120/208/240 V AC

Complementary

Interrupt Rating	10 kA at 120/240 V AC 10 kA at 240 V AC 10 kA at 120 V AC
Number of Panel Spaces	4
Wire Size	AWG 8...AWG 2 copper or aluminium
Tightening Torque	5 N.m
Height	79 mm
Width	76 mm
Depth	74 mm
Net weight	0.535 kg

Environment

Certifications	UL listed CSA
Ambient Rating	40 °C

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1

List Price displayed is VAT EXCLUSIVE.

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Package 1 Height	8.128 cm
Package 1 Width	9.398 cm
Package 1 Length	11.684 cm
Package 1 Weight	535.239 g

Contractual warranty

Warranty (in months)	18
----------------------	----

Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

Environmental footprint	
Environmental Disclosure	Product Environmental Profile

Use Better


Materials and Substances	
Packaging made with recycled cardboard	No
Packaging without single use plastic	Yes
EU RoHS Directive	Compliant
SCIP Number	Af42fb01-813d-40c0-ae28-b8b3299dbc99
REACH Regulation	REACH Declaration
Halogen-free status	Halogen free product

Use Again

Repack and remanufacture	
End of life manual availability	No need of specific recycling operations
Take-back	No

Technical Illustration

Dimensions

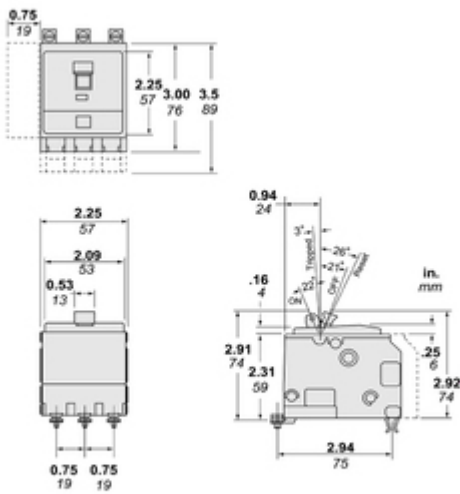

Dimensions are approximate. Refer to technical documentation for additional detail.

Technical Illustration

Wiring diagram

